


TEFLON LINED: FOR DEMINERALIZED WATER



PRESSURE <= 16 bar

Pulses ON-OFF K1 (1 mp/litre) ÷ K 0,25 (4 pulses/l.)

AC: T° Max: <= 90°C

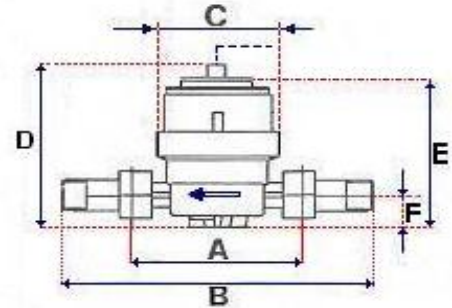

	DN diameter Ø	Ø13	Ø20	Ø25	Ø30	Ø40
MAX. FLOW	Q.Max. m ³ /h	3	5	7	10	20
CONTINUOUS FLOW	Q.n. m ³ /h	1,3	2,5	3,5	5	10
MIN. FLOW 2% ERR.	Q.t. l/h	120	200	280	400	800
MIN. FLOW 5% ERR.	Q.min. l/h	30	50	70	100	200
MIN. FLOW	Q.rl. l/h	10	15	20	20	25
	A →	110	130	160	160	200
	B	190	228	260	280	340
	C	80	80	100	100	110
	D	175	175	185	185	195
	E	108	108	128	128	142
	F	24	24	34	34	42
	Ø"	1/2"	3/4"	1"	1,1/4"	1,1/2"



MADE IN ITALY

WATER METER WITH LIGHT LINING

HIGH-TECH VERSION: ACCURACY +/-1% - TEST CERTIFICATE FOR EACH METER IN HYDRAULIC BENCH

STANDARD VERSION: ACCURACY +/-2%

DRY DIAL

BEMA Instruments

info@bemainstruments.com - www.bemainstruments.com